


2014-2-28

## ZAJ350



### STAINLESS STEEL EXPLOSION-PROOF BOX

#### MAIN FEATURES

- stainless steel 304, or SS316L
- IP66
- With 6 sets of G3/4 (NPT3/4) ,cable connection gland
- Exd II B (H<sup>2</sup>) T6 Gb/ DIP A20, TA, T6
- Installation in outdoor, petrochemical, high corrosive environment.
- CNEX certificate no.: CNEx 13.4245
- fit for gas zone 1, zone 2, dust zone 20, 21, 22

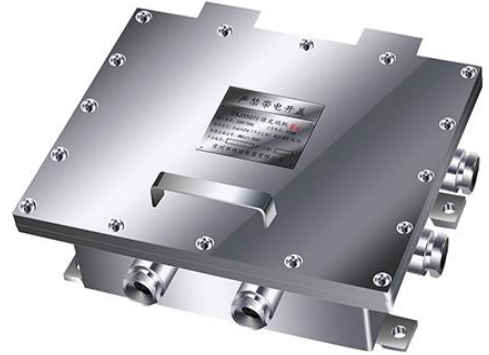
**ZAJ350**

Model	ZAJ350
Atmospheric pressure	80KPa~106Kpa
Ambinet temperature	-40°C ~ 60°C
Relative Humidity	≤95% (+25°C)
Certifications	CNEX: Exd II B(H <sup>2</sup> )T6, DIP A20 TA, T6
Ingress Protection	IP66
Package dimension LxWxH	382x308x144mm
Net weight	17.1kg
Material	SUS304/ SUS316L
Inner size	240x210x101mm ; 9.4x8.3x4.0in
Max voltage	AC220V (AC85-265VAC)
Max electrical current	≤500ml
Number of Threaded holes	6 holes
threaded hole	G3/4 (NPT3/4)
can load	1/2/4 optical conveter,power adaptor

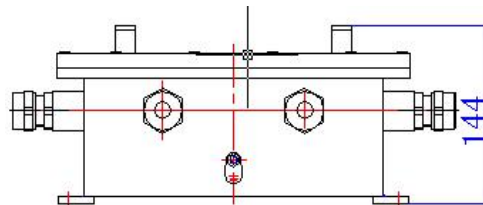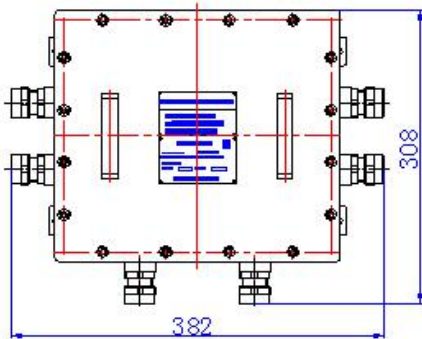

specifications subject to change without notice.© ZUO AN all rights reserved.

skype: cookee.lee

tel +86-15295033359